

BCS3600^{ex}-IS Accessories

Datasheet



It is absolutely necessary to use original accessories from BARTEC!

Accessories for use in potentially explosive atmospheres

Accessories are approved for:

- ATEX: Zone 1/21 (EPS 18 ATEX 1 199 X + EPS 17 ATEX 1 177 X)
- IECEx: Zone 1/21 (IECEx EPS 18.0100X + IECEx EPS 17.0090X)




Battery

Description	<div><div>- for hand-held scanner BCS3678^{ex}-IS</div><div>- Lithium-Ion battery 3.6 V/2800 mAh (10.08 Wh)</div></div> <div>May only be changed and charged outside the potentially explosive atmosphere!</div>
Order no.	17-A1Z0-0012



Leather holster

Description	<div><div>- for attachment to a belt or wall</div><div>- Color: black</div></div>
Order no.	17-A1Z0-0024

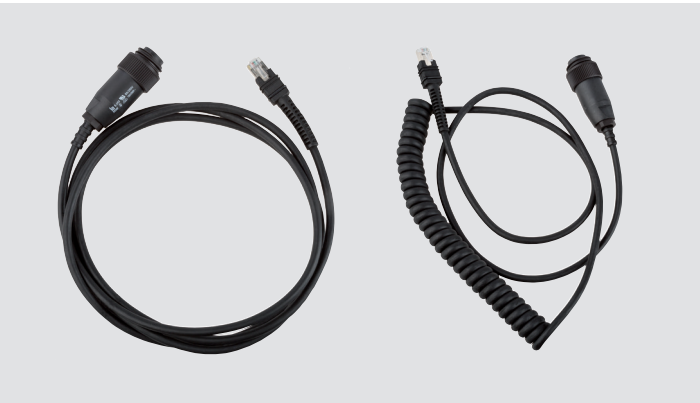

Connecting cable

Description	- Connection between supply module and hand-held scanner BCS3608 ^{ex} -IS	
Order no.	1.9 m (plain)	17-A1Z0-0015
	4.5 m (plain)	17-A1Z0-0016
	2.7 m (spiral)	17-A1Z0-0017

Accessories for use outside potentially explosive atmospheres



4-slot battery charging station

Description	<ul style="list-style-type: none">for hand-held scanner BCS3678^{EX}-ISInput voltage: DC 12 V (50 W)Charging indicator via LED
Scope of delivery	4-slot battery charging station
Also required	(Not included in the delivery) <ul style="list-style-type: none">Power supply with DC connecting cable (G7-A0Z0-0019)AC power cable
Order no.	17-A1Z0-0013



Base station

Description	<ul style="list-style-type: none">for hand-held scanner BCS3678^{EX}-ISInput voltage: DC 12 VData synchronisation via Bluetooth, Supported interfaces (full functionality as specified by Zebra): USB + RS232Charging the battery inserted in the hand-held scannerCharging function and charging indicator via LED <p>Operating mode:</p> <ul style="list-style-type: none">Point-to-Point (1x scanner paired with 1x base station - default setting)Multipoint-to-Point (7x scanners can be paired with 1x base station)
Scope of delivery	Base station
Also required	(Not included in the delivery) <ul style="list-style-type: none">Power supply with DC connecting cable (G7-A0Z0-0019)AC power cableConnecting cable RS232 oder USB (17-A1Z0-....)* <p>* Connecting cable absolutely necessary between power supply and base station. Power supply cannot be connected directly to the base station.</p>
Order no.	17-A1Z0-0014



Programming cable USB

Description	<div><div></div><div>identical with Connecting cable USB</div><div></div><div>Programming BCS3608^{ex}-IS via PC</div><div></div><div>Programming BCS3678^{ex}-IS via PC and base station</div><div></div><div>1.9 m (plain)</div></div>
Scope of delivery	Programming cable USB
Also required	<div>(Not included in the delivery)</div> <div><div></div><div>Power supply with DC connecting cable (G7-A0Z0-0019)</div><div></div><div>AC power cable</div><div></div><div>Base station (when using the BCS3678^{ex}-IS)</div></div>
Order no.	17-A1Z0-0020



Connecting cable RS232

Description	<div><div></div><div>for hand-held scanner BCS3678^{ex}-IS</div><div></div><div>Connection between PC and base station</div><div></div><div>Cable with terminal for 12 V power supply</div></div>
Scope of delivery	Connecting cable RS232
Also required	<div>(Not included in the delivery)</div> <div><div></div><div>Power supply with DC connecting cable (G7-A0Z0-0019)</div><div></div><div>AC power cable</div></div>
Order no.	<div>1.9 m (plain)17-A1Z0-0026</div> <div>4.5 m (plain)17-A1Z0-0027</div>



Connecting cable USB

Description	<div><div></div><div>identical with programming cable USB</div><div></div><div>for hand-held scanner BCS3678^{ex}-IS</div><div></div><div>Connection between PC and Base station</div><div></div><div>Cable with terminal for 12 V power supply</div><div></div><div>1.9 m (plain)</div></div>
Scope of delivery	Connecting cable USB
Also required	<div>(Not included in the delivery)</div> <div><div></div><div>Power supply with DC connecting cable (G7-A0Z0-0019)</div><div></div><div>AC power cable</div></div>
Order no.	17-A1Z0-0020



Power supply with DC connecting cable

Description	<div><div></div><div>for 4-slot battery charging station and base station</div><div></div><div>Input voltage: AC 100 to 240 V</div><div></div><div>Output voltage: DC 12 V/4.16 A/50 W</div></div>
Order no.	G7-A0Z0-0019



AC power cable

Description	<div><div>– 3-wire</div><div>– country-specific</div></div>	
Order no.	Version: US + Canada	G7-A0Z0-0024
	Version: EU + APAC	G7-A0Z0-0026
	Version: Taiwan	G7-A0Z0-0027
Please purchase the required country-specific cables in the respective country!		



Special tool for lock nut

Description	<div><div>– for hand-held scanner BCS3678^{ex}</div><div>– open and lock the safety lock nut on the battery compartment</div><div>– 5 pieces</div></div>	
Order no.	G7-A0Z0-0031	